


ADDENDUM NO. 1  
BOYS AND GIRLS CLUB WELL PROJECT  
ISSUED JUNE 17, 2011

Clarification and changes

1. Note that no bid, performance or payment bond is required for this project. However, 10% retainage will be withheld from every pay request until the Owner has accepted the project as complete and/or all lien waivers have been received. These changes are shown on Page 2 of the Solicitation to Drillers, in paragraph 5 on Page 1 of the Bid Form, and on Page 4 of the Agreement (Article 2 – Section I).
2. Clarification of the Scope of Work – Page 2 of the Specifications and Sheet 2 of the Drawings. The well driller will be responsible for the pilot holes, geophysical logging, and abandonment as necessary; drilling the production well and installing the casing, screen, sand and grout; development and test pumping; and installation of the permanent pump, drop pipe and check valves, air line and pitless unit.

However, the driller will not be required to provide the pump starter or controls, power cable or conduit outside of the well (including the disconnect), the concrete pad around the well, water lines or other work outside of the well. This work will be done by others.

3. Geophysical Logging.
  - Geophysical logs will be run on the pilot holes. The log shall be run open hole from the surface to the bottom of the hole. The logging will consist of an induction electrical log including both spontaneous potential and resistivity logs (point, short and long normal), a gamma log and a caliper log.
  - The Contractor shall provide three copies of the field log and 6 copies of the final log for the geophysical logs.
  - Measurement for the geophysical logging will be by lineal foot of completed logs.
  - The geophysical logging will be paid at the contract price per lineal foot of logging.

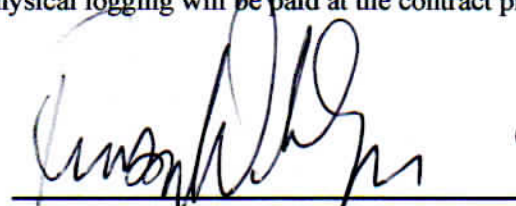

6-17-11

Russell Dahlgren PE, PG  
Dahlgren Consulting, Inc.